rotronic

Datenblatt - Fiche technique - Data sheet

11.03.1588

ROLINE Mini SAS – Anschlusskabel, 1,5m

ROLINE Câble Mini SAS , 1,5 m

ROLINE External Mini SAS Cable, 1.5 m, black,

REV.	DESCRIPTION	MDF'D	APP'D	DATE
06	MODIFY BACKSHELL DIM	Jin	James	06/30/2009
07	REVISED DRAWING FORMAT	Jin	James	02/23/2010
08	CHANGE RAW CABLE	Jin	James	12/30/2010

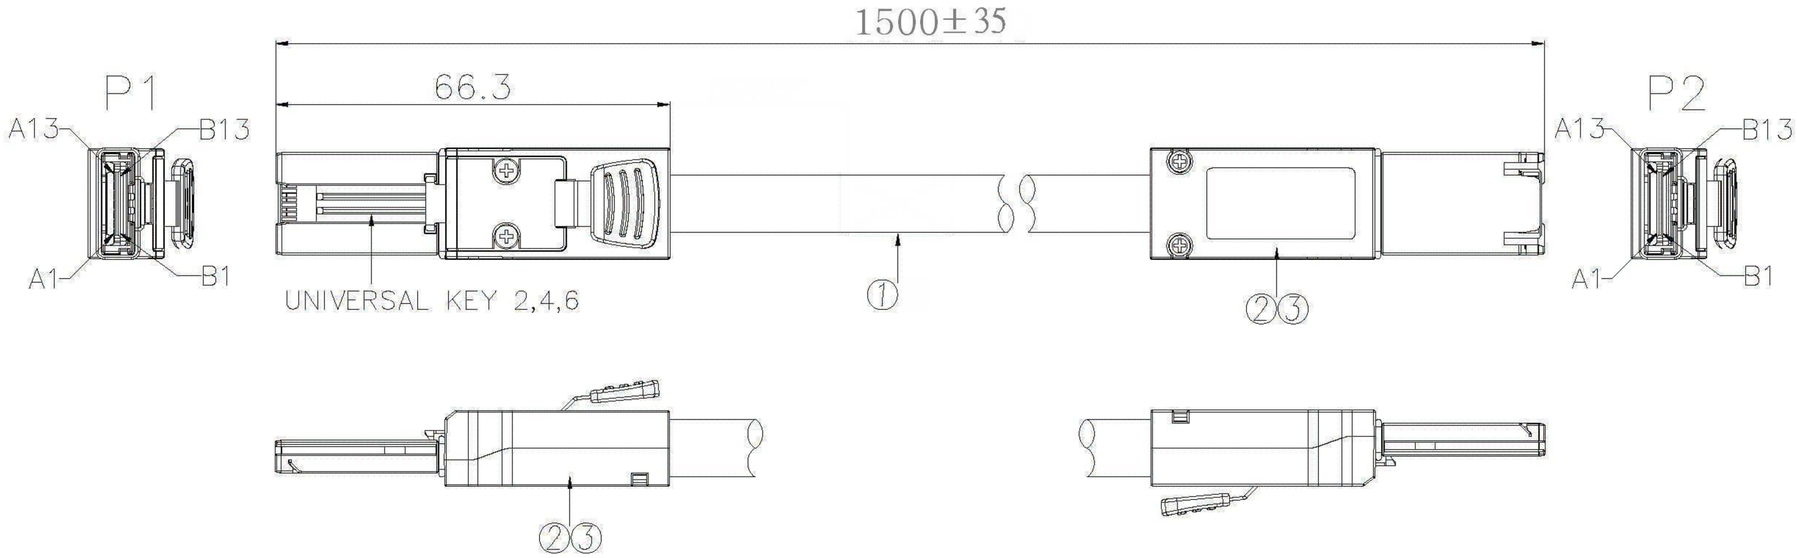

WIRING TABLE

P1			P2	
GROUND	A1		B1	GROUND
RX0+	A2	◁	B2	TX0+
RX0−	A3	◁	B3	TX0−
GROUND	A4		B4	GROUND
RX1+	A5	◁	B5	TX1+
RX1−	A6	◁	B6	TX1−
GROUND	A7		B7	GROUND
RX2+	A8	◁	B8	TX2+
RX2−	A9	◁	B9	TX2−
GROUND	A10		B10	GROUND
RX3+	A11	◁	B11	TX3+
RX3−	A12	◁	B12	Tx3−
GROUND	A13		B13	GROUND
GROUND	B13		A13	GROUND
Tx3−	B12	▷	A12	RX3−
TX3+	B11	▷	A11	RX3+
GROUND	B10		A10	GROUND
TX2−	B9	▷	A9	RX2−
TX2+	B8	▷	A8	RX2+
GROUND	B7		A7	GROUND
TX1−	B6	▷	A6	RX1−
TX1+	B5	▷	A5	RX1+
GROUND	B4		A4	GROUND
TX0−	B3	▷	A3	RX0−
TX0+	B2	▷	A2	RX0+
GROUND	B1		A1	GROUND
CHASSIS GROUND			CHASSIS GROUND	

HIGH−SPEED SERIAL DIFFERENTIAL PAIRS

SIGNAL RETURN

CHASSIS GROUND

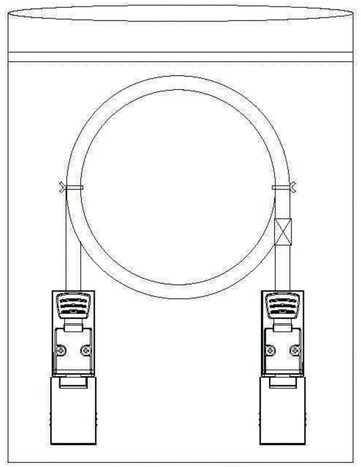

PACKAGE



DUST COVER

NOTE:
1.PE BAG SIZE:L300 X W230mm

ITEM	DESCRIPTION	Q'TY
9		
8		
7		
6		
5		
4		1
3	SFF 8088 26PIN UNIVERSAL KEY (2,4,6) COVER KIT W/BLUE LATCH	2
2	SFF 8088 26PIN CABLE END CONNECTOR (30u")	2
1	TWIN−AX CABLE (28AWG x 8PAIR),100ohm, BLACK, UL APPROVED	A/R

RoHS COMPLIANT

Unit : mm

GENERAL TOLERANCES: (UNLESS SPECIFIED)
0 = ±.45
0.0 = ±.30
0.00 = ±.20
0.000 = ±.10
0° = ± 2°
0.0° = ± 1°

PROJECTION

D.R. Jin 12/30/2010
CH.K Sung 12/30/2010
APV.D James 12/30/2010

Rotronic Co., Ltd.

ROLINE External Mini SAS Cable, 1.5m, black

PRODUCT NO. OR LAYOUT

SCALE N/A | SIZE A3 | **Item No.: 11.03.1588**

REV. 08

SH,T NO. 1OF 1